


Monarch
Intelligent Retail Solutions

Avery Dennison® Monarch® Tabletop Printer 2 (ADTP2™)

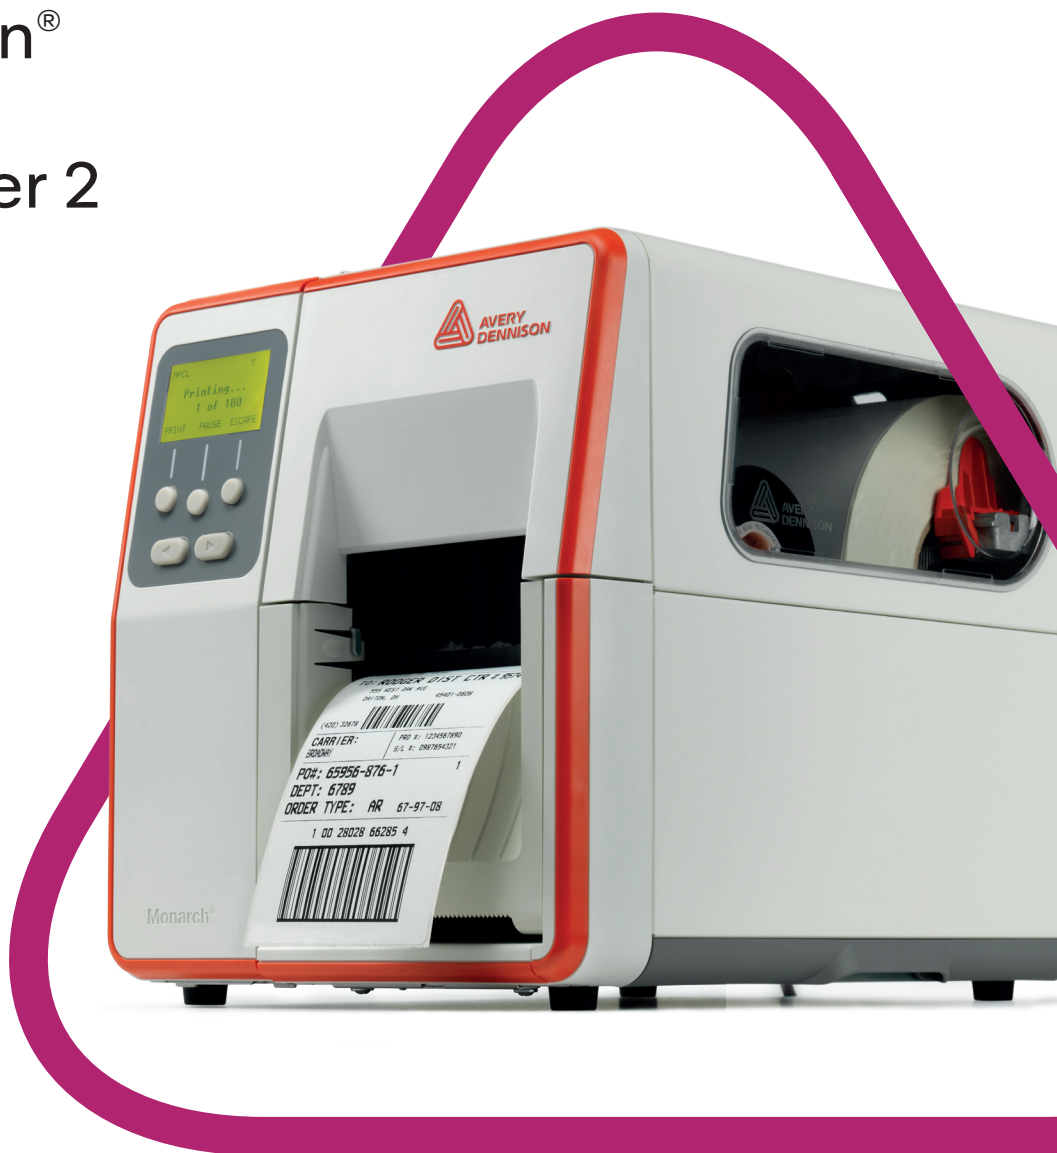

www.monarch.com

The Avery Dennison® Tabletop Printer 2 (ADTP2™) is a high performance thermal printing and RFID encoding solution in a compact form factor. It can print and encode label and tag material at up to 8 inches per second for continuous batch production. In addition, the ADTP2 can also support on-demand and one-at-a-time tag printing, encoding and cutting for short-run or replacement applications.



Avery Dennison® Monarch® Tabletop Printer 2 (ADTP2™)

Ideal in the backroom of the store

In the Retail Store, our Avery Dennison Monarch ADTP2 is ideal in the Backroom area. It has the benefits of a high speed printer, but is compact in size making it convenient to sit on a table in the backroom. If items need re-tagged or re-labeled, the ADTP2 printers provide accurate barcode or RFID-encoded tags as well as shipping labels to fulfill ecommerce orders.

Small size, high productivity

The ADTP2 is ideal for label and tag production in a retail store application, exception label and tag production in a distribution center, or any printing application that requires high performance in a small space.

- The same rugged, reliable, field proven print mechanism as in our larger tabletop printers.
- 33% larger ribbon capacity than similar printers and the ability to hold a 200 meter supply* for less downtime due to supply changeover.
- Integrated Barcode Assured™, our proprietary fail-safe dot shifting auto correct feature, reduces the incidence of unscannable barcodes and extends usable printhead life.
- When printhead replacement is required, a tool-free replacement mechanism enables replacement in seconds, by anyone.
- Folding supply door reduces the space needed beside and above the printer.

Designed to be easy

- Unique tilting print mechanism, illuminated loading area and highlighted touch-points make supply loading effortless.
- Three-color backlit LCD display provides instant visual identification of printer status.
- Standard USB, Ethernet, RS-232 and optional dual-band wireless networking allow easy connection to host systems in a broad range of environments.
- Usable as a standalone system with a keyboard, keypad and barcode scanner accessories for data entry.

Non-stop RFID print and encode

- Able to continuously encode RFID supplies.
- Patented non-stop print and encode technology provides up to 3 times the throughput of even full-size tabletop printers.
- Integrated RFID EPC verifier provides an additional data integrity check, to virtually eliminate RFID data errors and provide an audit record for traceability.

Sustainable labeling

- You can decrease your environmental footprint using our EcoCapacity+™ thin liner labels. Switching to EcoCapacity+™ significantly reduces water and energy use, solid waste production and CO2 emissions.**
- ENERGY STAR® certified.



Three-color backlit display provides instant visual identification of printer status.



Specifications

Dimensions

Height: 12.25" (311 mm)
Width: 11.0" (279 mm)
Depth: 17.2" (437 mm)
Weight: 25 lbs. (11.4kg)
Shipping weight: 32 lbs. (14.5 kg)

Print properties

Printing method

Thermal Direct or Thermal Transfer

Printhead width

4.09" (102 mm/812 dots)

Printhead resolution

203 dpi (8 dots / mm) or 300 dpi (12 dots / mm)

Maximum print area

4.0" x 16.0" (102 mm x 406 mm) with the 203 dpi printhead.
4.0" x 13.0" (102 mm x 330 mm) with the 300 dpi printhead.
Larger images (up to 16 feet) can be printed using continuous supply and reallocating memory.

Print speed

2.5 ips (64 mm/sec) – default for serial bar codes with narrow elements less than 3 dots.
4 ips (102 mm/sec) – 203 dpi serial bar codes with narrow elements of 3 dots or greater.
6.0 ips (152 mm/sec) – default for parallel bar codes, max for label peel and liner takeup.
8.0 ipsm (203 mm/sec).

Sensing methods

Edge: Die Cut, Black Mark, Aperture, Attacher Hole
Center: Die Cut, Black Mark, Attacher Hole

Operator interface

Keypad: 5-button keypad control
Display: LCD Graphical Dot Matrix (128W x 64H dots), 2.54" (64.5mm) Wide x 1.46" (37.0 mm) High.
Display Backlight: White (Idle), Green (Active), Red (Error).

Memory

SDRAM: 64 MB
Flash: 64 MB

Printer emulation

Languages: MPCL, MLI.

Communications

USB 2.0 Device Port: 1 port, B Receptacle.
USB 2.0 Host Port: 2 ports, A Receptacle.
RS-232C Serial Port: DB-9F, DTE pin out, 115.2K baud max communications speed.

Wired Networking: 802.3u Ethernet, 10/100 Mbps, RJ-45 connector.

Wireless Networking: Optional, 802.11 a/b/g/n dual band (2.4 GHz & 5 GHz), WPA2, 802.11i compliant.

Real time clock

Real Time Clock: Standard

RFID encoder

Optional, EPCglobal UHF Class 1 Gen 2 / ISO 18000-63 (formerly 18000-6C). Supports worldwide UHF RFID frequency ranges.

RFID reader

Optional, Integrated post-encode-and-print reader module. Validates actual encoded data against requested data.

Bar code types

1-Dimensional – UPCA +2/+5, UPCE +2/+5, EAN8 +2/+5, EAN13 +2/+5, EAN128 Interleaved 2 of 5, Extended Code 39, Codabar (NW7), Code 128, Code 16K, Code 93, MSI, Postnet, Intelligent Mail, GS1 Databar.
2-Dimensional – PDF417, MaxiCode, Data Matrix (ECC-200), Quick Response (QR Code), Aztec.

Standard fonts

Bitmap – Standard, Reduced, Bold, OCRA-like, CG Triumvirate, and CG Triumvirate Bold TrueType® – EFF Swiss Bold. Supports downloaded double-byte TrueType and bitmap fonts, allowing for international character sets.

Font magnification

1x to 7x
4 to 250 pt. for scalable/ TrueType® fonts

Environmental

Operating temperature

40° – 104° F (4° – 40°C) for Thermal Direct
– 40° – 95° F (4° – 35°C) for Thermal Transfer

Storage temperature

15° – 120° F (–9° – 49°C)

Relative humidity

5 – 90% Non-condensing

Power source

90-264 VAC with auto select 50/60 Hz
Optional 24 VDC regulator

Power consumption

62 Watts printing, 4 Watts (Sleep mode),
Certified Energy Star Compliant.

Warranty

Printer

One (1) year parts and labor. Full written warranty statement available on request.

Printhead

One (1) million inches or six (6) months, whichever occurs first.

Supplies Specifications

Supply types

Tags and Adhesive Labels (Paper or Synthetic) in roll or fanfold format. Perforated or continuous supply.

Supply width

0.75" – 4.25" (19.1 – 108.0 mm)

Width with peel option

0.75" – 4.25" (19.1 – 108.0 mm)

Supply length (indexed)

0.32" to 17.5" (8 mm to 445 mm)

Supply Roll Diameter

8.0" OD (203 mm) on 3" (76mm) Core

Typical roll length

5,905" (150 m)
7,874" (200m) with EcoCapacity+

Ribbon length

23,622" (600 Meters)

Ribbon core

1" (25.4mm) plastic

Supply thickness

4.5 – 13.5 mils (0.14 – 0.33 mm)

Avery Dennison® Service and Support

Our technical specialists and service representatives can provide installation support, training and operating recommendations. For more information call: 800.543.6650, option 7.

Our Monarch® Intelligent Retail Solutions improve efficiency, increase margins, reduce waste and enhance the consumer experience throughout the global supply chain.

Contact us

170 Monarch Lane, Miamisburg, OH 45342
937 865 2123 (direct) Tel +800 543 6650 (8:00 a.m.–6:30 p.m., EDT)
identification.solutions@averydennison.com

The information contained herein is believed to be reliable but Avery Dennison makes no representations concerning the accuracy or correctness of the data. This product, like any other should be tested by the customer/user thoroughly under end user conditions to ensure the product meets the particular requirements. Independent results may vary. Avery Dennison and the logo are registered trademarks of Avery Dennison Corp. Third party trademarks and/or trade names used herein are the property of their respective owner(s).
©2023 Avery Dennison Corporation. All Rights Reserved.